



CENTURION

SOLAR REGULATOR WITH USB OUTPUT PORT



Product Dimensions

Overall dimension (mm)	128 x 85.6 x 34.8
Mounting dimension (mm)	118
Mounting hole size (mm)	∅ 4.5
Terminal	6mm ²
Weight	151.6g
Enclosure	IP30

Product Specifications

Nominal system voltage	12V / 24V
Rated battery current	20A
Max. battery voltage	32V
Max. PV open circuit voltage	50V
Self-consumption	≤ 6mA
Equalize charging voltage	Gel: ----, Sealed: 14.6V, Flooded: 14.8V
Boost charging voltage	Gel: 14.2V, Sealed: 14.4V, Flooded: 14.6V
Float charging voltage	Gel / Sealed / Flooded: 13.8V
Low voltage reconnect voltage	Gel / Sealed / Flooded: 12.6V
Low voltage disconnect voltage	Gel / Sealed / Flooded: 11.1V
Charge circuit voltage drop	≤ 0.26V
Discharge circuit voltage drop	≤ 0.15V
Temp. compensation	-5mV / °C / 2V (ref)
Working temperature	-35°C - +55°C
Storage temperature	-35°C - +80°C
Humidity	≤ 95% N.C

Call 0860-CENTURION (0860 236 887)

Technical support line: 0861 003 123 (Monday - Friday: 07h00 - 18h00)

www.centsys.com

@askCenturion

facebook.com/CenturionSystems

YouTube.com/CenturionSystems



Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.



CENTURION



SOLAR REGULATOR WITH USB OUTPUT PORT



Product Dimensions

Overall dimension (mm)	128 x 85.6 x 34.8
Mounting dimension (mm)	118
Mounting hole size (mm)	∅ 4.5
Terminal	6mm ²
Weight	151.6g
Enclosure	IP30

Product Specifications

Nominal system voltage	12V / 24V
Rated battery current	20A
Max. battery voltage	32V
Max. PV open circuit voltage	50V
Self-consumption	≤ 6mA
Equalize charging voltage	Gel: ----, Sealed: 14.6V, Flooded: 14.8V
Boost charging voltage	Gel: 14.2V, Sealed: 14.4V, Flooded: 14.6V
Float charging voltage	Gel / Sealed / Flooded: 13.8V
Low voltage reconnect voltage	Gel / Sealed / Flooded: 12.6V
Low voltage disconnect voltage	Gel / Sealed / Flooded: 11.1V
Charge circuit voltage drop	≤ 0.26V
Discharge circuit voltage drop	≤ 0.15V
Temp. compensation	-5mV / °C / 2V (ref)
Working temperature	-35°C - +55°C
Storage temperature	-35°C - +80°C
Humidity	≤ 95% N.C

Call 0860-CENTURION (0860 236 887)

Technical support line: 0861 003 123 (Monday - Friday: 07h00 - 18h00)

www.centsys.com

[@askCenturion](https://twitter.com/askCenturion)

facebook.com/CenturionSystems

YouTube.com/CenturionSystems



Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.





SOLAR REGULATOR WITH USB OUTPUT PORT



Product Dimensions

Overall dimension (mm)	128 x 85.6 x 34.8
Mounting dimension (mm)	118
Mounting hole size (mm)	∅ 4.5
Terminal	6mm ²
Weight	151.6g
Enclosure	IP30

Product Specifications

Nominal system voltage	12V / 24V
Rated battery current	20A
Max. battery voltage	32V
Max. PV open circuit voltage	50V
Self-consumption	≤ 6mA
Equalize charging voltage	Gel: ----, Sealed: 14.6V, Flooded: 14.8V
Boost charging voltage	Gel: 14.2V, Sealed: 14.4V, Flooded: 14.6V
Float charging voltage	Gel / Sealed / Flooded: 13.8V
Low voltage reconnect voltage	Gel / Sealed / Flooded: 12.6V
Low voltage disconnect voltage	Gel / Sealed / Flooded: 11.1V
Charge circuit voltage drop	≤ 0.26V
Discharge circuit voltage drop	≤ 0.15V
Temp. compensation	-5mV / °C / 2V (ref)
Working temperature	-35°C - +55°C
Storage temperature	-35°C - +80°C
Humidity	≤ 95% N.C

Call 0860-CENTURION (0860 236 887)

Technical support line: 0861 003 123 (Monday - Friday: 07h00 - 18h00)

www.centsys.com

[@askCenturion](https://twitter.com/askCenturion)

facebook.com/CenturionSystems

YouTube.com/CenturionSystems



Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.





SOLAR REGULATOR WITH USB OUTPUT PORT



Product Dimensions

Overall dimension (mm)	128 x 85.6 x 34.8
Mounting dimension (mm)	118
Mounting hole size (mm)	Ø 4.5
Terminal	6mm ²
Weight	151.6g
Enclosure	IP30

Product Specifications

Nominal system voltage	12V / 24V
Rated battery current	20A
Max. battery voltage	32V
Max. PV open circuit voltage	50V
Self-consumption	≤ 6mA
Equalize charging voltage	Gel: ----, Sealed: 14.6V, Flooded: 14.8V
Boost charging voltage	Gel: 14.2V, Sealed: 14.4V, Flooded: 14.6V
Float charging voltage	Gel / Sealed / Flooded: 13.8V
Low voltage reconnect voltage	Gel / Sealed / Flooded: 12.6V
Low voltage disconnect voltage	Gel / Sealed / Flooded: 11.1V
Charge circuit voltage drop	≤ 0.26V
Discharge circuit voltage drop	≤ 0.15V
Temp. compensation	-5mV / °C / 2V (ref)
Working temperature	-35°C - +55°C
Storage temperature	-35°C - +80°C
Humidity	≤ 95% N.C

Call 0860-CENTURION (0860 236 887)

Technical support line: 0861 003 123 (Monday - Friday: 07h00 - 18h00)

www.centsys.com

[@askCenturion](https://twitter.com/askCenturion)


facebook.com/CenturionSystems

YouTube.com/CenturionSystems



Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.



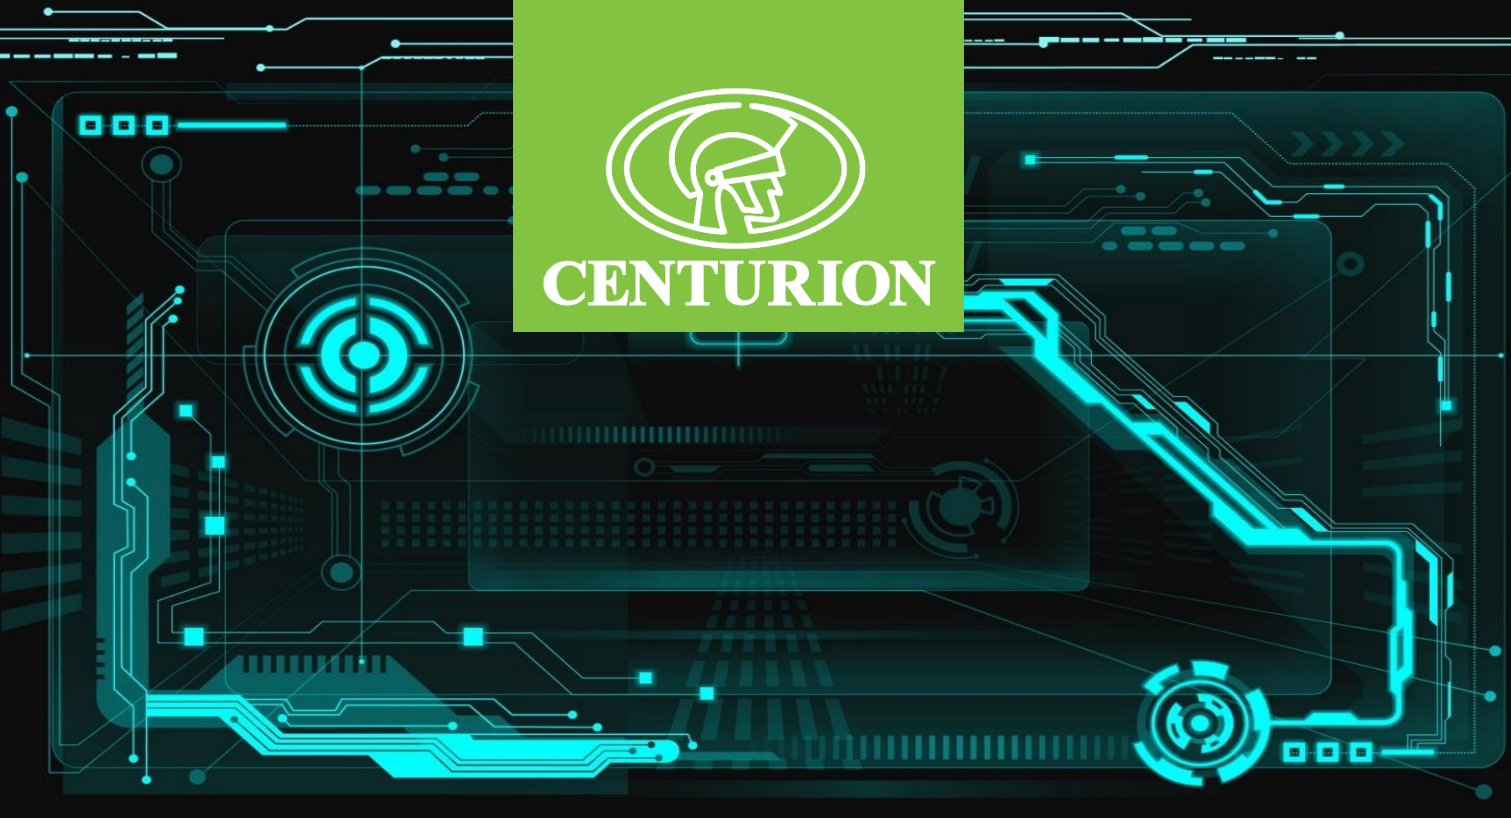

SOLAR REGULATOR WITH USB OUTPUT PORT



Product Dimensions

Overall dimension (mm)	128 x 85.6 x 34.8
Mounting dimension (mm)	118
Mounting hole size (mm)	∅ 4.5
Terminal	6mm ²
Weight	151.6g
Enclosure	IP30

Product Specifications

Nominal system voltage	12V / 24V
Rated battery current	20A
Max. battery voltage	32V
Max. PV open circuit voltage	50V
Self-consumption	≤ 6mA
Equalize charging voltage	Gel: ----, Sealed: 14.6V, Flooded: 14.8V
Boost charging voltage	Gel: 14.2V, Sealed: 14.4V, Flooded: 14.6V
Float charging voltage	Gel / Sealed / Flooded: 13.8V
Low voltage reconnect voltage	Gel / Sealed / Flooded: 12.6V
Low voltage disconnect voltage	Gel / Sealed / Flooded: 11.1V
Charge circuit voltage drop	≤ 0.26V
Discharge circuit voltage drop	≤ 0.15V
Temp. compensation	-5mV / °C / 2V (ref)
Working temperature	-35°C - +55°C
Storage temperature	-35°C - +80°C
Humidity	≤ 95% N.C

Call 0860-CENTURION (0860 236 887)

Technical support line: 0861 003 123 (Monday - Friday: 07h00 - 18h00)

www.centsys.com

[@askCenturion](https://twitter.com/askCenturion)

facebook.com/CenturionSystems

YouTube.com/CenturionSystems



Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.

