




INSTALLATION

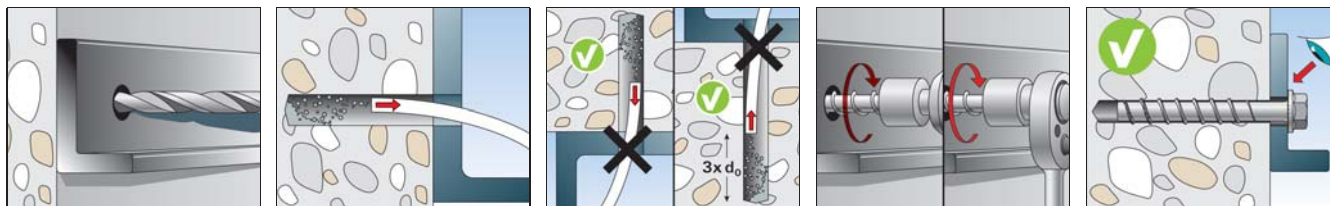

FIXTURE ADJUSTMENT

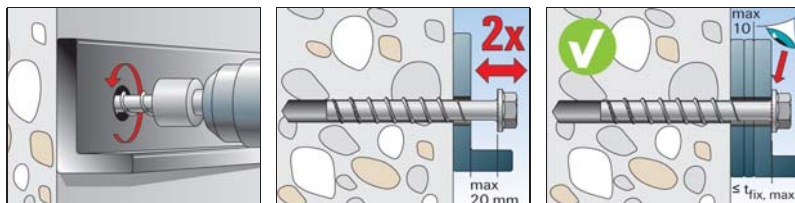


ADDITIONAL FOR SEISMIC



TECHNICAL DATA



ULTRACUT FBS II US - hexagon head with integral washer

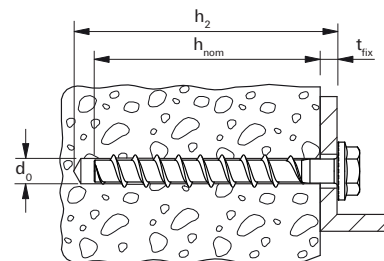


Item	Part No.	Approval ETA	Drill hole diameter	Min. drill hole depth for fixings	Screw	Screw-in depth with fixture thickness	Screw-in depth with fixture thickness	Screw-in depth with fixture thickness	Drive	Sales unit
			d_0 [mm]	h_2 [mm]	$d_a \times l_s$ [mm]	h_{nom1} / t_{fix} [mm]	h_{nom2} / t_{fix} [mm]	h_{nom3} / t_{fix} [mm]		[pcs]
ULTRACUT FBSII 8x55 5/- US TX	FSBHU08055	■	8	65	10 x 55	50 / 5	- / -	- / -	TX40/SW13	50
ULTRACUT FBSII 8x70 20/5 US TX	FSBHU08070	■	8	80	10 x 70	50 / 20	- / -	65 / 5	TX40/SW13	50
ULTRACUT FBSII 8x80 30/15 US TX	536853*	■	8	90	10 x 80	50 / 30	- / -	65 / 15	TX40/SW13	50
ULTRACUT FBSII 8x90 40/25 US TX	FSBHU08090	■	8	100	10 x 90	50 / 40	- / -	65 / 25	TX40/SW13	50
ULTRACUT FBSII 8x100 50/35 US TX	536855*	■	8	110	10 x 100	50 / 50	- / -	65 / 35	TX40/SW13	50
ULTRACUT FBSII 8x110 60/45 US TX	536856*	■	8	120	10 x 110	50 / 60	- / -	65 / 45	TX40/SW13	50
ULTRACUT FBSII 8x130 80/65 US TX	536857*	■	8	140	10 x 130	50 / 80	- / -	65 / 65	TX40/SW13	50
ULTRACUT FBSII 10x60 5/-/- US	FSBHU10060	■	10	70	12 x 60	55 / 5	- / -	- / -	SW 15	50
ULTRACUT FBSII 10x70 15/5/- US	FSBHU10070	■	10	80	12 x 70	55 / 15	65 / 5	- / -	SW 15	50
ULTRACUT FBSII 10x80 25/15/- US	FSBHU10080	■	10	90	12 x 80	55 / 25	65 / 15	- / -	SW 15	50
ULTRACUT FBSII 10x90 35/25/5 US	FSBHU10090	■	10	100	12 x 90	55 / 35	65 / 25	85 / 5	SW 15	50
ULTRACUT FBSII 10x100 45/35/15 US	FSBHU10100	■	10	110	12 x 100	55 / 45	65 / 35	85 / 15	SW 15	50
ULTRACUT FBSII 10x120 65/55/35 US	FSBHU10120	■	10	130	12 x 120	55 / 65	65 / 55	85 / 35	SW 15	50
ULTRACUT FBSII 10x140 85/75/55 US	FSBHU10140	■	10	150	12 x 140	55 / 85	65 / 75	85 / 55	SW 15	50
ULTRACUT FBSII 10x160 105/95/75 US	FSBHU10160	■	10	170	12 x 160	55 / 105	65 / 95	85 / 75	SW 15	50
ULTRACUT FBSII 10x200 145/135/115 US	FSBHU10200	■	10	210	12 x 200	55 / 145	65 / 135	85 / 115	SW 15	20
ULTRACUT FBSII 10x230 175/165/145 US	FSBHU10230	■	10	240	12 x 230	55 / 175	65 / 165	85 / 145	SW 15	20
ULTRACUT FBSII 10x260 205/195/175 US	FSBHU10260	■	10	270	12 x 260	55 / 205	65 / 195	85 / 175	SW 15	20
ULTRACUT FBSII 12x70 10/-/- US	FSBHU120070	■	12	80	14 x 70	60 / 10	- / -	- / -	SW 17	20
ULTRACUT FBSII 12x85 25/10/- US	FSBHU12085	■	12	95	14 x 85	60 / 25	75 / 10	- / -	SW 17	20
ULTRACUT FBSII 12x110 50/35/10 US	FSBHU12110	■	12	120	14 x 110	60 / 50	75 / 35	100 / 10	SW 17	20
ULTRACUT FBSII 12x130 70/55/30 US	FSBHU12130	■	12	140	14 x 130	60 / 70	75 / 55	100 / 30	SW 17	20
ULTRACUT FBSII 12x150 90/75/50 US	FSBHU12150	■	12	160	14 x 150	60 / 90	75 / 75	100 / 50	SW 17	20
ULTRACUT FBSII 14x75 10/-/- US	FSBHU14075	■	14	90	16 x 75	65 / 10	- / -	- / -	SW 21	20
ULTRACUT FBSII 14x95 30/10/- US	536875*	■	14	110	16 x 95	65 / 30	85 / 10	- / -	SW 21	20
ULTRACUT FBSII 14x100 35/15/- US	FSBHU14100	■	14	115	16 x 100	65 / 35	85 / 15	- / -	SW 21	20
ULTRACUT FBSII 14x125 60/40/10 US	FSBHU14125	■	14	140	16 x 125	65 / 60	85 / 40	115 / 10	SW 21	10
ULTRACUT FBSII 14x150 85/65/35 US	FSBHU14150	■	14	165	16 x 150	65 / 85	85 / 65	115 / 35	SW 21	10

*available on request

TECHNICAL DATA




ULTRACUT FBS II SK - countersunk head

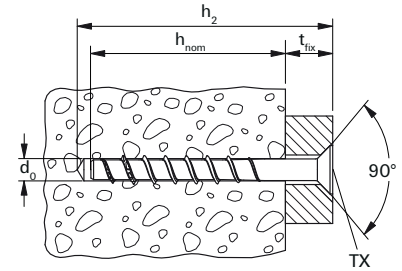


Item	Part No.	Approval ETA	Drill hole diameter	Min. drill hole depth for through fixings	Screw	Screw-in depth with fixture thickness	Screw-in depth with fixture thickness	Screw-in depth with fixture thickness	Drive	Sales unit
			d_0 [mm]	h_2 [mm]	$d_a \times l_s$ [mm]	h_{nom1} / t_{fix} [mm]	h_{nom2} / t_{fix} [mm]	h_{nom3} / t_{fix} [mm]		
ULTRACUT FBSII 8x60 10/- SK	FSBHUCSK08060	■	8	70	10 x 60	50 / 10	- / -	- / -	TX40	50
ULTRACUT FBSII 8x80 30/15 SK	FSBHUCSK08080	■	8	90	10 x 80	50 / 30	- / -	65 / 15	TX40	50
ULTRACUT FBSII 8x90 40/25 SK	FSBHUCSK08090	■	8	100	10 x 90	50 / 40	- / -	65 / 25	TX40	50
ULTRACUT FBSII 10x65 10/-/- SK	FSBHUCSK10065	■	10	75	12 x 65	55 / 10	- / -	- / -	TX50	50
ULTRACUT FBSII 10x80 25/15/- SK	536885*	■	10	90	12 x 80	55 / 25	65 / 15	- / -	TX50	50
ULTRACUT FBSII 10x95 40/30/10 SK	536886*	■	10	105	12 x 95	55 / 40	65 / 30	85 / 10	TX50	50
ULTRACUT FBSII 10x100 45/35/15 SK	FSBHUCSK10100	■	10	110	12 x 100	55 / 45	65 / 35	85 / 15	TX50	50
ULTRACUT FBSII 10x120 65/55/35 SK	FSBHUCSK10120	■	10	130	12 x 120	55 / 65	65 / 55	85 / 35	TX50	50

*available on request


INSTALLATION

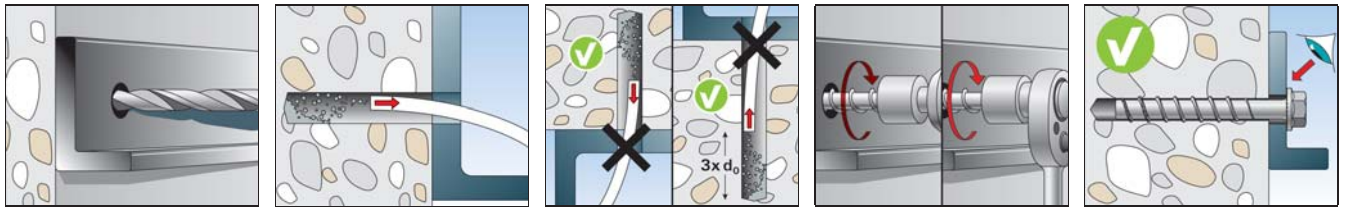

FIXTURE ADJUSTMENT

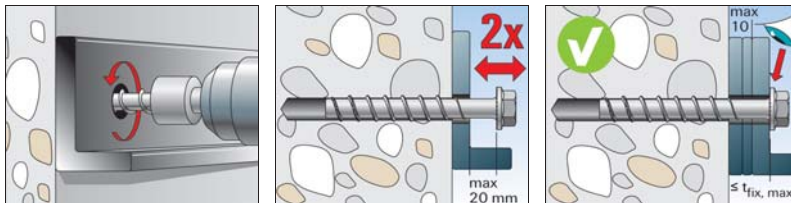


ADDITIONAL FOR SEISMIC



TECHNICAL DATA



ULTRACUT FBS II US - hexagon head with integral washer

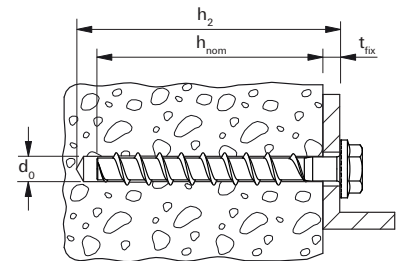


Item	Part No.	Approval ETA	Drill hole diameter	Min. drill hole depth for fixings	Screw	Screw-in depth with fixture thickness	Screw-in depth with fixture thickness	Screw-in depth with fixture thickness	Drive	Sales unit
			d_0 [mm]	h_2 [mm]	$d_a \times l_s$ [mm]	h_{nom1} / t_{fix} [mm]	h_{nom2} / t_{fix} [mm]	h_{nom3} / t_{fix} [mm]		[pcs]
ULTRACUT FBSII 8x55 5/- US TX	FSBH08055	■	8	65	10 x 55	50 / 5	- / -	- / -	TX40/SW13	50
ULTRACUT FBSII 8x70 20/5 US TX	FSBH08070	■	8	80	10 x 70	50 / 20	- / -	65 / 5	TX40/SW13	50
ULTRACUT FBSII 8x80 30/15 US TX	536853*	■	8	90	10 x 80	50 / 30	- / -	65 / 15	TX40/SW13	50
ULTRACUT FBSII 8x90 40/25 US TX	FSBH08090	■	8	100	10 x 90	50 / 40	- / -	65 / 25	TX40/SW13	50
ULTRACUT FBSII 8x100 50/35 US TX	536855*	■	8	110	10 x 100	50 / 50	- / -	65 / 35	TX40/SW13	50
ULTRACUT FBSII 8x110 60/45 US TX	536856*	■	8	120	10 x 110	50 / 60	- / -	65 / 45	TX40/SW13	50
ULTRACUT FBSII 8x130 80/65 US TX	536857*	■	8	140	10 x 130	50 / 80	- / -	65 / 65	TX40/SW13	50
ULTRACUT FBSII 10x60 5/-/- US	FSBH10060	■	10	70	12 x 60	55 / 5	- / -	- / -	SW 15	50
ULTRACUT FBSII 10x70 15/5/- US	FSBH10070	■	10	80	12 x 70	55 / 15	65 / 5	- / -	SW 15	50
ULTRACUT FBSII 10x80 25/15/- US	FSBH10080	■	10	90	12 x 80	55 / 25	65 / 15	- / -	SW 15	50
ULTRACUT FBSII 10x90 35/25/5 US	FSBH10090	■	10	100	12 x 90	55 / 35	65 / 25	85 / 5	SW 15	50
ULTRACUT FBSII 10x100 45/35/15 US	FSBH10100	■	10	110	12 x 100	55 / 45	65 / 35	85 / 15	SW 15	50
ULTRACUT FBSII 10x120 65/55/35 US	FSBH10120	■	10	130	12 x 120	55 / 65	65 / 55	85 / 35	SW 15	50
ULTRACUT FBSII 10x140 85/75/55 US	FSBH10140	■	10	150	12 x 140	55 / 85	65 / 75	85 / 55	SW 15	50
ULTRACUT FBSII 10x160 105/95/75 US	FSBH10160	■	10	170	12 x 160	55 / 105	65 / 95	85 / 75	SW 15	50
ULTRACUT FBSII 10x200 145/135/115 US	FSBH10200	■	10	210	12 x 200	55 / 145	65 / 135	85 / 115	SW 15	20
ULTRACUT FBSII 10x230 175/165/145 US	FSBH10230	■	10	240	12 x 230	55 / 175	65 / 165	85 / 145	SW 15	20
ULTRACUT FBSII 10x260 205/195/175 US	FSBH10260	■	10	270	12 x 260	55 / 205	65 / 195	85 / 175	SW 15	20
ULTRACUT FBSII 12x70 10/-/- US	FSBH120070	■	12	80	14 x 70	60 / 10	- / -	- / -	SW 17	20
ULTRACUT FBSII 12x85 25/10/- US	FSBH12085	■	12	95	14 x 85	60 / 25	75 / 10	- / -	SW 17	20
ULTRACUT FBSII 12x110 50/35/10 US	FSBH12110	■	12	120	14 x 110	60 / 50	75 / 35	100 / 10	SW 17	20
ULTRACUT FBSII 12x130 70/55/30 US	FSBH12130	■	12	140	14 x 130	60 / 70	75 / 55	100 / 30	SW 17	20
ULTRACUT FBSII 12x150 90/75/50 US	FSBH12150	■	12	160	14 x 150	60 / 90	75 / 75	100 / 50	SW 17	20
ULTRACUT FBSII 14x75 10/-/- US	FSBH14075	■	14	90	16 x 75	65 / 10	- / -	- / -	SW 21	20
ULTRACUT FBSII 14x95 30/10/- US	536875*	■	14	110	16 x 95	65 / 30	85 / 10	- / -	SW 21	20
ULTRACUT FBSII 14x100 35/15/- US	FSBH14100	■	14	115	16 x 100	65 / 35	85 / 15	- / -	SW 21	20
ULTRACUT FBSII 14x125 60/40/10 US	FSBH14125	■	14	140	16 x 125	65 / 60	85 / 40	115 / 10	SW 21	10
ULTRACUT FBSII 14x150 85/65/35 US	FSBH14150	■	14	165	16 x 150	65 / 85	85 / 65	115 / 35	SW 21	10

*available on request

TECHNICAL DATA



ULTRACUT FBS II SK - countersunk head

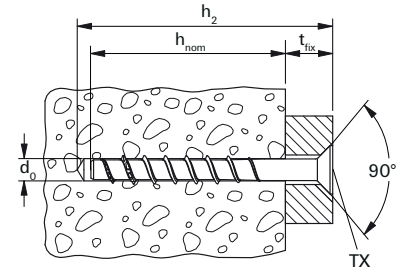

Item	Part No.	Approval ETA	Drill hole diameter	Min. drill hole depth for through fixings	Screw	Screw-in depth with fixture thickness	Screw-in depth with fixture thickness	Screw-in depth with fixture thickness	Drive	Sales unit
			d_0 [mm]	h_2 [mm]	$d_a \times l_s$ [mm]	h_{nom1} / t_{fix} [mm]	h_{nom2} / t_{fix} [mm]	h_{nom3} / t_{fix} [mm]		
ULTRACUT FBSII 8x60 10/- SK	FSBHUCSK08060	■	8	70	10 x 60	50 / 10	- / -	- / -	TX40	50
ULTRACUT FBSII 8x80 30/15 SK	FSBHUCSK08080	■	8	90	10 x 80	50 / 30	- / -	65 / 15	TX40	50
ULTRACUT FBSII 8x90 40/25 SK	FSBHUCSK08090	■	8	100	10 x 90	50 / 40	- / -	65 / 25	TX40	50
ULTRACUT FBSII 10x65 10/-/- SK	FSBHUCSK10065	■	10	75	12 x 65	55 / 10	- / -	- / -	TX50	50
ULTRACUT FBSII 10x80 25/15/- SK	536885*	■	10	90	12 x 80	55 / 25	65 / 15	- / -	TX50	50
ULTRACUT FBSII 10x95 40/30/10 SK	536886*	■	10	105	12 x 95	55 / 40	65 / 30	85 / 10	TX50	50
ULTRACUT FBSII 10x100 45/35/15 SK	FSBHUCSK10100	■	10	110	12 x 100	55 / 45	65 / 35	85 / 15	TX50	50
ULTRACUT FBSII 10x120 65/55/35 SK	FSBHUCSK10120	■	10	130	12 x 120	55 / 65	65 / 55	85 / 35	TX50	50

*available on request


TECHNICAL DATA



ULTRACUT FBS II US A4 - hexagon head with molded washer, stainless steel A4



ULTRACUT FBS II SK A4 - countersunk head, stainless steel A4

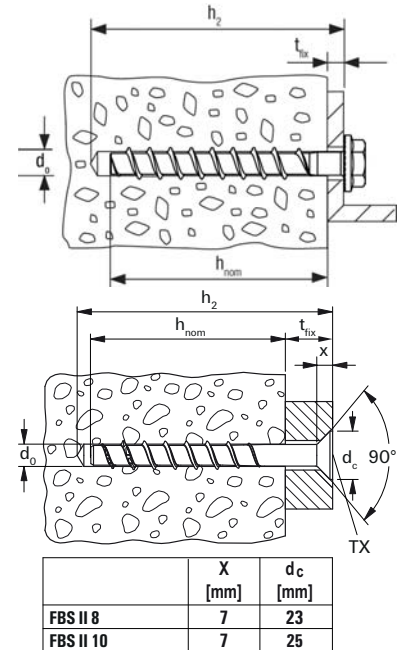


Item	Part Number	Approval ETA	Drill hole diameter d ₀ [mm]	Min. drill hole depth for through fixings h ₂ [mm]	Screw length l _s [mm]	Screw-in depth with fixture thickness h _{nom1} / t _{fix} [mm]	Screw-in depth with fixture thickness h _{nom3} / t _{fix} [mm]	Screw-in depth with fixture thickness h _{nom2} / t _{fix} [mm]	Drive	Sales unit [pcs]
FBS II 8 x 60 10/- US A4	543565*	■	8	70	60	50 / 10	- / -	- / -	SW 13	50
FBS II 8 x 70 5/- US A4	FSBHUSS08070	■	8	80	70	50 / 20	65 / 5	- / -	SW 13	50
FBS II 8 x 80 15/- US A4	543567*	■	8	90	80	50 / 30	65 / 15	- / -	SW 13	50
FBS II 8 x 90 25/- US A4	543568*	■	8	100	90	50 / 40	65 / 25	- / -	SW 13	50
FBS II 10 x 60 5/-/- US A4	543569*	■	10	70	60	55 / 5	- / -	- / -	SW 15	50
FBS II 10 x 70 15/5/- US A4	543570*	■	10	80	70	55 / 15	- / -	65 / 5	SW 15	50
FBS II 10 x 80 25/15/- US A4	FSBHUSS10080	■	10	90	80	55 / 25	- / -	65 / 15	SW 15	50
FBS II 10 x 90 5/- US A4	FSBHUSS10090	■	10	100	90	55 / 35	85 / 5	65 / 25	SW 15	50
FBS II 10 x 100 15/- US A4	FSBHUSS10100	■	10	110	100	55 / 45	85 / 15	65 / 35	SW 15	50
FBS II 10 x 120 35/- US A4	543574*	■	10	130	120	55 / 65	85 / 35	65 / 55	SW 15	50
FBS II 12 x 70 10/-/- US A4	543575*	■	12	80	70	60 / 10	- / -	- / -	SW 17	20
FBS II 12 x 85 25/10/- US A4	FSBHUSS12085	■	12	95	85	60 / 25	- / -	75 / 10	SW 17	20
FBS II 12 x 110 10/- US A4	FSBHUSS12110	■	12	120	110	60 / 50	100 / 10	75 / 35	SW 17	50
FBS II 12 x 130 30/- US A4	FSBHUSS12130	■	12	140	130	60 / 70	100 / 30	75 / 55	SW 17	20
FBS II 8 x 60 10/- SK A4	FSBHUSSCSK08060	■	8	70	60	50 / 10	- / -	- / -	TX40	50
FBS II 8 x 80 15/- SK A4	FSBHUSSCSK08080	■	8	90	80	50 / 30	65 / 15	- / -	TX40	50
FBS II 8 x 90 25/- SK A4	FSBHUSSCSK08090	■	8	100	90	50 / 40	65 / 25	- / -	TX40	50
FBS II 10 x 65 10/-/- SK A4	FSBHUSSCSK10065	■	10	75	65	55 / 10	- / -	- / -	TX50	50
FBS II 10 x 80 25/15/- SK A4	FSBHUSSCSK10080	■	10	90	80	55 / 25	- / -	65 / 15	TX50	50
FBS II 10 x 95 10/- SK A4	543584*	■	10	105	95	55 / 40	85 / 10	65 / 30	TX50	50
FBS II 10 x 100 15/- SK A4	FSBHUSSCSK10100	■	10	110	100	55 / 45	85 / 15	65 / 35	TX50	50
FBS II 10 x 120 35/- SK A4	FSBHUSSCSK10120	■	10	130	120	55 / 65	85 / 35	65 / 55	TX50	50


*available on request.

INSTALLATION DATA - CONCRETE C20/25 - C50/60

Type US

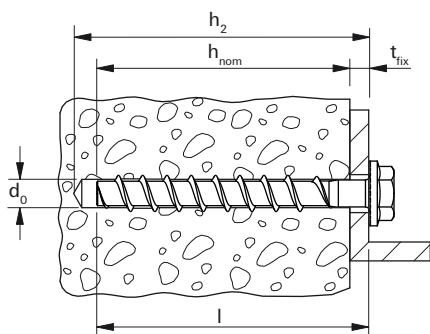

Type SK

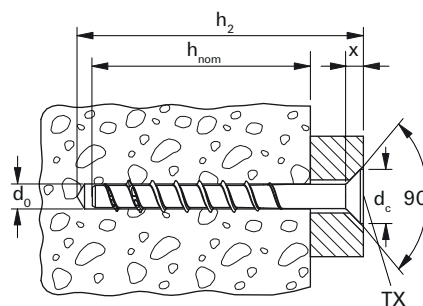

	X [mm]	dc [mm]
ULTRACUT FBS II 8	6	20
ULTRACUT FBS II 10	7	23

Concrete screw ULTRACUT FBS II 8-14			8	10	12	14
Drill hole diameter	d0	[mm]	8	10	12	14
Nominal screw-in depth	hnom1	[mm]	50	55	60	65
	hnom2	[mm]	-	65	75	85
	hnom3	[mm]	65	85	100	115
Drill hole depth (push-through installation)	h2 ≥	[mm]	l + 10	l + 10	l + 10	l + 15
Clearance hole diameter	df		10,6 - 12	12,8 - 14	14,8 - 16	16,9 - 18
Max. torque for installation with impact screw driver in concrete	Timp, max		600	650	650	650
Width across flat	SW		13	15	17	21
Drive	Torx		T40 (SK a. US)	T50 (SK)	-	-

INSTALLATION DATA - MASONRY

Concrete screw ULTRACUT FBS II 8-14					
Building material	Compressive strength class [N/mm ²]	Size	[mm]	8	10
		hnom	[mm]	65	85
Solid clay brick (EN771-1)	≥ 12	Tinst	[Nm]	10	10
Solid sand-lime brick (EN771-2)	≥ 12	Tinst	[Nm]	15	15
Aerated concrete (EN771-4)	≥ 6	Tinst	[Nm]	5	5

INSTALLATION OF CONCRETE SCREWS (USE A CORDLESS OR CABLED IMPACT WRENCH)

Concrete screw ULTRACUT FBS II 8-14	Maximum torque gvz [Nm]	Maximum torque A4 [Nm]
FBS II 8	600	450
FBS II 10	650	450
FBS II 12	650	650
FBS II 14	650	-

*1) The values apply to concrete strength of approx. 40N/mm², for other concrete strength classes the values may differ.
The conversion of nominal output into effective tightening torque varies from machine to machine - always therefore use torque control.

LOADS FOR CRACKED CONCRETE

Concrete screw ULTRACUT FBS II

zinc plated steel

Permissible loads of a single anchor in cracked normal concrete (concrete tension zone) of strength class C20/25 (~B25) ^{1) 2) 3) 10)}											Minimum spacings while reducing the load		
Type	Material fixing element	Minimum member thickness	Screw-in depth		Maximum installation torque	Installation torque	Permissible tensile load	Permissible shear load	Required edge distance (with one edge) for		Required spacing for	Min. spacing	Min. edge distance
			h_{min} [mm]	h_{nom} [mm]					Max. tension load c [mm]	Max. shear load c [mm]			
			T_{max} [Nm]	$T_{imp,max}^{6)}$ [Nm]	$N_{perm}^{7)}$ [kN]	$V_{perm}^{7)}$ [kN]	Max. Load s_{scr} [mm]	$s_{min}^{8)}$ [mm]	$c_{min}^{8)}$ [mm]				
FBS II 6x40 ⁵⁾	gvz	80	40	10	450	1,2	4,3	35	110	100	35	35	
FBS II 6x45 ⁵⁾	gvz	90	45	10	450	1,7	4,3	35	105	110	35	35	
FBS II 6x50 ⁵⁾	gvz	90	50	10	450	1,9	4,3	35	100	120	35	35	
FBS II 6x55 ⁵⁾	gvz	100	55	10	450	2,4	6,3	35	145	135	35	35	
FBS II 8x50	gvz	100	50	0	600	2,9	4,3	35	90	120	35	35	
FBS II 8x65	gvz	120	65	0	600	5,7	9,0	70	180	160	35	35	
FBS II 10x55	gvz	100	55	0	650	4,3	4,8	55	100	130	40	40	
FBS II 10x65	gvz	120	65	0	650	5,7	12,5	70	250	155	40	40	
FBS II 10x85	gvz	140	85	0	650	9,6	16,6	105	305	205	40	40	
FBS II 12x60	gvz	110	60	0	650	5,5	11,0	70	230	145	50	50	
FBS II 12x75	gvz	130	75	0	650	8,0	15,2	90	290	180	50	50	
FBS II 12x100	gvz	150	100	0	650	12,5	20,3	125	355	245	50	50	
FBS II 14x65	gvz	120	65	0	650	6,1	12,1	75	235	150	60	60	
FBS II 14x85	gvz	140	85	0	650	9,4	18,8	100	340	205	60	60	
FBS II 14x115	gvz	180	115	0	650	15,4	29,4	140	465	280	60	60	

For the design the complete assessment ETA-15/0352 has to be considered.⁹⁾

¹⁾ The partial safety factors for material resistance as regulated in the ETA-15/0352 as well as a partial safety factor for load actions of $\gamma_L = 1,4$ are considered. As an single anchor counts e.g. an anchor with a spacing $s \geq 3 \cdot h_{ef}$ and an edge distance $c \geq 1,5 \cdot h_{ef}$. Accurate data see ETA-15/0352.

²⁾ For higher concrete strength classes up to C50/60 higher permissible loads may be possible.

³⁾ Drill method hammer drilling resp. hollow drilling. For further allowable drill methods see ETA-15/0352.

⁴⁾ The anchorage depths smaller than 40 mm are only allowed for single anchors as part of a multiple fixing of non-structural systems.

⁵⁾ Diamond drilling not permitted.

⁶⁾ Maximum allowable torque for installation with any tangential impact screw driver.

⁷⁾ For combinations of tensile loads and shear loads or for shear loads with lever arm (bending moments) as well as reduced edge distances or spacings (anchor groups) we recommend to use our anchor design software C-FIX.

⁸⁾ Minimum possible axial spacings resp. edge distance while reducing the permissible load.

⁹⁾ The given loads refer to the European Technical Assessment ETA-15/0352, issue date 30/10/2018. Design of the loads according ETAG 001, Annex C, Method A (for static resp. quasi-static loads).

¹⁰⁾ A reinforcement in the concrete to prevent splitting is required. The width of the cracks has to be limited under consideration of the splitting forces at $w_k \sim 0,3$ mm.

LOADS FOR NON-CRACKED CONCRETE

Concrete screw ULTRACUT FBS II

zinc plated steel

Permissible loads of a single anchor in non-cracked normal concrete (concrete compression zone) of strength class C20/25 (~B25) ^{1) 2) 3)}											Minimum spacings while reducing the load		
Type	Material fixing element	Minimum member thickness	Screw-in depth		Maximum installation torque	Installation torque	Permissible tensile load	Permissible shear load	Required edge distance (with one edge) for		Required spacing for	Min. spacing	Min. edge distance
			h_{min} [mm]	h_{nom} [mm]					Max. tension load c [mm]	Max. shear load c [mm]			
			T_{max} [Nm]	$T_{imp,max}^{6)}$ [Nm]	$N_{perm}^{7)}$ [kN]	$V_{perm}^{7)}$ [kN]	Max. Load s_{scr} [mm]	$s_{min}^{8)}$ [mm]	$c_{min}^{8)}$ [mm]				
FBS II 6x40 ⁵⁾	gvz	80	40	10	450	3,8	4,3	40	75	100	35	35	
FBS II 6x45 ⁵⁾	gvz	90	45	10	450	4,8	4,3	50	70	110	35	35	
FBS II 6x50 ⁵⁾	gvz	90	50	10	450	5,7	4,3	55	70	120	35	35	
FBS II 6x55 ⁵⁾	gvz	100	55	10	450	6,4	6,3	60	100	135	35	35	
FBS II 8x50	gvz	100	50	0	600	6,1	6,1	60	90	120	35	35	
FBS II 8x65	gvz	120	65	0	600	9,0	9,0	80	125	160	35	35	
FBS II 10x55	gvz	100	55	0	650	6,8	6,8	65	100	130	40	40	
FBS II 10x65	gvz	120	65	0	650	8,8	14,0	80	195	155	40	40	
FBS II 10x85	gvz	140	85	0	650	13,5	16,6	105	210	205	40	40	
FBS II 12x60	gvz	110	60	0	650	7,7	15,2	70	220	145	50	50	
FBS II 12x75	gvz	130	75	0	650	11,2	15,2	90	195	180	50	50	
FBS II 12x100	gvz	150	100	0	650	17,5	20,3	125	240	245	50	50	

LOADS

Concrete screw ULTRACUT FBS II

zinc plated steel

Permissible loads of a single anchor in non-cracked normal concrete (concrete compression zone) of strength class C20/25 (~B25) ^{1) 2) 3)}											Minimum spacings while reducing the load	
Type	Material fixing element	Minimum member thickness h_{min} [mm]	Screw-in depth h_{nom} [mm]	Maximum installation torque T_{max} [Nm]	Installation torque $T_{imp,max}^{6)}$ [Nm]	Permissible tensile load $N_{perm}^{7)}$ [kN]	Permissible shear load $V_{perm}^{7)}$ [kN]	Required edge distance (with one edge) for		Required spacing for Max. Load s_{cr} [mm]	Min. spacing $s_{min}^{8)}$ [mm]	Min. edge distance $c_{min}^{8)}$ [mm]
								Max. tension load c [mm]	Max. shear load c [mm]			
FBS II 14x65	gvz	120	65	0	650	8,5	17,0	75	235	150	60	60
FBS II 14x85	gvz	140	85	0	650	13,2	22,1	100	275	205	60	60
FBS II 14x115	gvz	180	115	0	650	21,6	29,4	140	315	280	60	60

For the design the complete assessment ETA-15/0352 has to be considered.⁹⁾

¹⁾ The partial safety factors for material resistance as regulated in the ETA-15/0352 as well as a partial safety factor for load actions of $\gamma_L = 1,4$ are considered. As a single anchor counts e.g. an anchor with a spacing $s \geq 3 \cdot h_{ef}$ and an edge distance $c \geq 1,5 \cdot h_{ef}$. Accurate data see ETA-15/0352.

²⁾ For higher concrete strength classes up to C50/60 higher permissible loads may be possible.

³⁾ Drill method hammer drilling resp. hollow drilling. For further allowable drill methods see ETA-15/0352.

⁴⁾ The anchorage depths smaller than 40 mm are only allowed for single anchors as part of a multiple fixing of non-structural systems.

⁵⁾ Diamond drilling not permitted.

⁶⁾ Maximum allowable torque for installation with any tangential impact screw driver.

⁷⁾ For combinations of tensile loads and shear loads or for shear loads with lever arm (bending moments) as well as reduced edge distances or spacings (anchor groups) we recommend to use our anchor design software C-FIX.

⁸⁾ Minimum possible axial spacings resp. edge distance while reducing the permissible load.

⁹⁾ The given loads refer to the European Technical Assessment ETA-15/0352, issue date 30/10/2018. Design of the loads according ETAG 001, Annex C, Method A (for static resp. quasi-static loads).

LOADS FOR CRACKED CONCRETE FBSII A4 STAINLESS

Concrete screw with hexagon head and washer ULTRACUT FBS II A4 US

stainless steel

Permissible loads of a single anchor in cracked normal concrete (concrete tension zone) of strength class C20/25 (~B25) ^{1) 2) 3) 8)}											Minimum spacings while reducing the load	
Type	Material fixing element	Minimum member thickness h_{min} [mm]	Screw-in depth h_{nom} [mm]	Installation torque $T_{imp,max}^{4)}$ [Nm]	Permissible tensile load $N_{perm}^{5)}$ [kN]	Permissible shear load $V_{perm}^{5)}$ [kN]	Required edge distance (with one edge) for		Required spacing for Max. Load s_{cr} [mm]	Min. spacing $s_{min}^{6)}$ [mm]	Min. edge distance $c_{min}^{6)}$ [mm]	
							Max. tension load c [mm]	Max. shear load c [mm]				
FBS II 8x50	A4	100	50	450	1,9	4,3	35	90	120	35	35	
FBS II 8x65	A4	120	65	450	4,3	6,4	45	125	160	35	35	
FBS II 10x55	A4	100	55	450	2,1	4,8	40	100	130	40	40	
FBS II 10x65	A4	120	65	450	2,9	6,2	40	115	155	40	40	
FBS II 10x85	A4	140	85	450	7,6	19,2	75	360	205	40	40	
FBS II 12x60	A4	110	60	650	2,1	5,5	50	105	145	50	50	
FBS II 12x75	A4	130	75	650	5,2	15,9	50	305	180	50	50	
FBS II 12x100	A4	150	100	650	12,5	25,0	125	445	245	50	50	

For the design the complete assessment ETA-17/0740 has to be considered.⁷⁾

¹⁾ The partial safety factors for material resistance as regulated in the ETA-17/0740 as well as a partial safety factor for load actions of $\gamma_F = 1,4$ are considered. As a single anchor counts e.g. an anchor with a spacing $s \geq 3 \cdot h_{ef}$ and an edge distance $c \geq 1,5 \cdot h_{ef}$. Accurate data see ETA-17/0740.

²⁾ For higher concrete strength classes up to C50/60 higher permissible loads may be possible.

³⁾ Drill method Hammer drilling resp. hollow drilling. For further allowable drill methods see ETA-17/0740.

⁴⁾ Maximum allowable torque for installation with any tangential impact screw driver.

⁵⁾ For combinations of tensile loads and shear loads or for shear loads with lever arm (bending moments) as well as reduced edge distances or spacings (anchor groups) we recommend to use our anchor design software C-FIX.

⁶⁾ Minimum possible axial spacings resp. edge distance while reducing the permissible load.

⁷⁾ The given loads refer to the European Technical Assessment ETA-17/0740, issue date 23/10/2018. Design of the loads according TR055/ETAG 001, Annex C, Method A (for static resp. quasi-static loads).

⁸⁾ A reinforcement in the concrete to prevent splitting is required. The width of the cracks has to be limited under consideration of the splitting forces at $w_k \sim 0,3$ mm.

LOADS FOR NON-CRACKED CONCRETE FBSII AY STAINLESS

Concrete screw with hexagon head and washer ULTRACUT FBS II A4 US

stainless steel

Permissible loads of a single anchor in non-cracked normal concrete (concrete compression zone) of strength class C20/25 (~B25) ¹⁾²⁾³⁾										Minimum spacings while reducing the load	
Type	Material fixing element	Minimum member thickness	Screw-in depth	Installation torque	Permissible tensile load	Permissible shear load	Required edge distance (with one edge) for		Required spacing for	Min. spacing	Min. edge distance
							Max. tension load c	Max. shear load c			
		h_{min} [mm]	h_{nom} [mm]	$T_{imp,max}^{4)}$ [Nm]	$N_{perm}^{5)}$ [kN]	$V_{perm}^{5)}$ [kN]	[mm]	[mm]	[mm]	[mm]	[mm]
FBS II 8x50	A4	100	50	450	3,3	6,1	35	90	120	35	35
FBS II 8x65	A4	120	65	450	6,7	9,0	55	120	160	35	35
FBS II 10x55	A4	100	55	450	4,0	6,8	40	100	130	40	40
FBS II 10x65	A4	120	65	450	6,7	8,8	55	115	155	40	40
FBS II 10x85	A4	140	85	450	13,5	20,9	105	270	205	40	40
FBS II 12x60	A4	110	60	650	4,8	7,7	50	105	145	50	50
FBS II 12x75	A4	130	75	650	5,7	22,4	50	300	180	50	50
FBS II 12x100	A4	150	100	650	17,5	26,2	125	320	245	50	50

For the design the complete assessment ETA-17/0740 has to be considered. ⁷⁾

¹⁾ The partial safety factors for material resistance as regulated in the ETA-17/0740 as well as a partial safety factor for load actions of $\gamma_F = 1,4$ are considered. As an single anchor counts e.g. an anchor with a spacing $s \geq 3 \cdot h_{ef}$ and an edge distance $c \geq 1,5 \cdot h_{ef}$. Accurate data see ETA-17/0740.

²⁾ For higher concrete strength classes up to C50/60 higher permissible loads may be possible.

³⁾ Drill method Hammer drilling resp. hollow drilling. For further allowable drill methods see ETA-17/0740.

⁴⁾ Maximum allowable torque for installation with any tangential impact screw driver.

⁵⁾ For combinations of tensile loads and shear loads or for shear loads with lever arm (bending moments) as well as reduced edge distances or spacings (anchor groups) we recommend to use our anchor design software C-FIX.

⁶⁾ Minimum possible axial spacings resp. edge distance while reducing the permissible load.

⁷⁾ The given loads refer to the European Technical Assessment ETA-17/0740, issue date 23/10/2018. Design of the loads according TR055/ETAG 001, Annex C, Method A (for static resp. quasi-static loads).

LOADS FOR CRACKED CONCRETE STAINLESS

Concrete screw with countersunk head ULTRACUT FBS II A4 SK

stainless steel

Permissible loads of a single anchor in cracked normal concrete (concrete tension zone) of strength class C20/25 (~B25) ¹⁾²⁾³⁾⁸⁾										Minimum spacings while reducing the load	
Type	Material fixing element	Minimum member thickness	Screw-in depth	Installation torque	Permissible tensile load	Permissible shear load	Required edge distance (with one edge) for		Required spacing for	Min. spacing	Min. edge distance
							Max. tension load c	Max. shear load c			
		h_{min} [mm]	h_{nom} [mm]	$T_{imp,max}^{4)}$ [Nm]	$N_{perm}^{5)}$ [kN]	$V_{perm}^{5)}$ [kN]	[mm]	[mm]	[mm]	[mm]	[mm]
FBS II 8x50	A4	100	50	450	1,9	4,3	35	90	120	35	35
FBS II 8x65	A4	120	65	450	4,3	6,4	45	125	160	35	35
FBS II 10x55	A4	100	55	450	2,1	4,8	40	100	130	40	40
FBS II 10x65	A4	120	65	450	2,9	6,2	40	115	155	40	40
FBS II 10x85	A4	140	85	450	7,6	19,2	75	360	205	40	40

For the design the complete assessment ETA-17/0740 has to be considered. ⁷⁾

¹⁾ The partial safety factors for material resistance as regulated in the ETA-17/0740 as well as a partial safety factor for load actions of $\gamma_F = 1,4$ are considered. As an single anchor counts e.g. an anchor with a spacing $s \geq 3 \cdot h_{ef}$ and an edge distance $c \geq 1,5 \cdot h_{ef}$. Accurate data see ETA-17/0740.

²⁾ For higher concrete strength classes up to C50/60 higher permissible loads may be possible.

³⁾ Drill method hammer drilling. For further allowable drill methods see ETA-17/0740.

⁴⁾ Maximum allowable torque for installation with any tangential impact screw driver.

⁵⁾ For combinations of tensile loads and shear loads or for shear loads with lever arm (bending moments) as well as reduced edge distances or spacings (anchor groups) we recommend to use our anchor design software C-FIX.

⁶⁾ Minimum possible axial spacings resp. edge distance while reducing the permissible load.

⁷⁾ The given loads refer to the European Technical Assessment ETA-17/0740, issue date 23/10/2018. Design of the loads according TR055/ETAG 001, Annex C, Method A (for static resp. quasi-static loads).

⁸⁾ A reinforcement in the concrete to prevent splitting is required. The width of the cracks has to be limited under consideration of the splitting forces at $w_k \sim 0,3$ mm.

LOADS FOR NON-CRACKED CONCRETE FBSII AY CSK

Concrete screw with countersunk head ULTRACUT FBS II A4 SK
stainless steel

Permissible loads of a single anchor in non-cracked normal concrete (concrete compression zone) of strength class C20/25 (~B25) ¹⁾²⁾³⁾										Minimum spacings while reducing the load	
Type	Material fixing element	Minimum member thickness h_{min} [mm]	Screw-in depth h_{nom} [mm]	Installation torque $T_{imp,max}^{4)}$ [Nm]	Permissible tensile load $N_{perm}^{5)}$ [kN]	Permissible shear load $V_{perm}^{5)}$ [kN]	Required edge distance (with one edge) for		Required spacing for Max. Load s_{cr} [mm]	Min. spacing $s_{min}^{6)}$ [mm]	Min. edge distance $c_{min}^{6)}$ [mm]
							Max. tension load c [mm]	Max. shear load c [mm]			
FBS II 8x50	A4	100	50	450	3,3	6,1	35	90	120	35	35
FBS II 8x65	A4	120	65	450	6,7	9,0	55	120	160	35	35
FBS II 10x55	A4	100	55	450	4,0	6,8	40	100	130	40	40
FBS II 10x65	A4	120	65	450	6,7	8,8	55	115	155	40	40
FBS II 10x85	A4	140	85	450	13,5	20,9	105	270	205	40	40

For the design the complete assessment ETA-17/0740 has to be considered. ⁷⁾

¹⁾ The partial safety factors for material resistance as regulated in the ETA-17/0740 as well as a partial safety factor for load actions of $\gamma_F = 1,4$ are considered. As a single anchor counts e.g. an anchor with a spacing $s \geq 3 \cdot h_{ef}$ and an edge distance $c \geq 1,5 \cdot h_{ef}$. Accurate data see ETA-17/0740.

²⁾ For higher concrete strength classes up to C50/60 higher permissible loads may be possible.

³⁾ Drill method hammer drilling. For further allowable drill methods see ETA-17/0740.

⁴⁾ Maximum allowable torque for installation with any tangential impact screw driver.

⁵⁾ For combinations of tensile loads and shear loads or for shear loads with lever arm (bending moments) as well as reduced edge distances or spacings (anchor groups) we recommend to use our anchor design software C-FIX.

⁶⁾ Minimum possible axial spacings resp. edge distance while reducing the permissible load.

⁷⁾ The given loads refer to the European Technical Assessment ETA-17/0740, issue date 23/10/2018. Design of the loads according TR055/ETAG 001, Annex C, Method A (for static resp. quasi-static loads).

LOADS FOR SOLID BRICK MASONRY

Concrete screw ULTRACUT FBS II

Highest recommended loads ¹⁾³⁾⁵⁾⁶⁾ for a single anchor, resp. a fixing point ⁴⁾⁵⁾⁶⁾ in solid brick masonry.

Base material	Compressive strength [N/mm ²]	Type	[mm]	ULTRACUT	
		Size		FBS II 8	FBS II 10
		Anchoring depth h_{nom}	[mm]	65	85
Solid clay brick ⁹⁾ (EN771-1) $\geq 240 \times 113 \times 115$ mm	≥ 12	Frec ²⁾³⁾	[kN]	1,1	1,4
	≥ 20	Frec ²⁾³⁾⁷⁾	[kN]	1,6	1,6
Solid sand-lime brick ⁹⁾ (EN771-2) $\geq 240 \times 71 \times 115$ mm	≥ 12	Frec ²⁾³⁾⁷⁾	[kN]	1,2	1,2
	≥ 20	Frec ²⁾³⁾⁷⁾	[kN]	1,2	1,2
Aerated concrete (EN771-4) $\geq 499 \times 249 \times 120$ mm	≥ 6	Frec ²⁾³⁾	[kN]	0,7	0,9
Minimum spacing within anchor groups of 2 or 4 anchors		s_{min}	[mm]	80	
Minimum spacing between single anchors, resp. anchor groups		s_{min}	[mm]	80	
Minimum distance to the horizontal joint		$c_{min,v}^{8)}$	[mm]	20	
Minimum distance to the vertical joint		$c_{min,h}^{8)}$	[mm]	40	
Minimum distance to the free edge		$c_{min,free\ edge}^{8)}$	[mm]	200	
Tightening torque ¹⁰⁾	Solid clay brick ⁹⁾	Ttighten	[Nm]	10	
	Solid sandlime brick ⁹⁾			15	
	Aerated concrete			5	

¹⁾ An appropriate safety factor is considered.

²⁾ The given loads apply to the given brick measures for masonry with superimposed load. Bigger brick sizes are minimum equal in case of the loads.

³⁾ The loads only apply to multiple fixings of non-load-bearing systems and are valid for tensile load, shear load and oblique load under any angle.

⁴⁾ On-site screw testing is recommended to validate technical data. If the joints are not visible 100% anchor testing is recommended due to the screws are only working in the bricks and not in the mortar joints.

⁵⁾ A fixing point can be a single anchor, 2 anchors or 4 anchors with a minimum spacing s_{min} . Anchor groups of 4 anchors are arranged in rectangular disposition.

⁶⁾ The fixing points have to be arranged in this way that there will be always maximum one fixing point arranged in one brick.

⁷⁾ Brick pull-out is decisive.

⁸⁾ The values $c_{min,v}$ and $c_{min,h}$ are only valid if the mortar joints are filled proper. Otherwise the joints has to be considered as free edges and $c_{min,free}$ is decisive. Minimum mortar strenght is M2.5


⁹⁾ The values are valid for unperforated solid bricks.

¹⁰⁾ The screw is screwed in with a cordless screwdriver, an impact screwdriver or by hand. The screwing process must be finished immediately when the screw head is in contact with the assembled object. The specified tightening torque must then be applied with a torque wrench.

TECHNICAL DATA



ULTRACUT FBS II M8/M10
- outside diameter

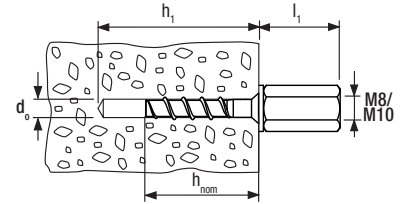

ULTRACUT FBS II M8/M10 I
- internal thread M8/M10

Item	Part No.	Approval ETA	Drill hole diameter d_0 [mm]	Min. drill hole depth for pre-positioned installation h_1 [mm]	Projection length l_1 [mm]	Screw-in depth h_{nom} [mm]	Drive	Sales unit [pcs]
FBSII 6 x 25 M8/19	546395	■	6	35	4	25	SW 10	100
FBSII 6 x 35 M8/19	546396	■	6	65	4	35	SW 10	100
FBSII 6 x 55 M8/19	546397	■	6	45	37	55	SW 10	100
FBSII 6 x 35 M10/21	546398	■	6	45	4	35	SW 13	100
FBSII 6 x 55 M10/21	546399	■	6	65	5	55	SW 13	100
FBSII 6 x 35 M8/M10 I	546400	■	6	45	5	35	SW 13	100
FBSII 6 x 55 M8/M10 I	FSBHUV10	■	6	65	37	55	SW 13	100

*available on request

LOADS

Concrete screw ULTRACUT FBS II 6

zinc plated steel

Permissible loads of a single anchor in cracked normal concrete (concrete tension zone) of strength class C20/25 (~B25) ^{1) 2) 3) 10)}											Minimum spacings while reducing the load	
Type	Material fixing element	Minimum member thickness h_{min} [mm]	Screw-in depth h_{nom} [mm]	Maximum installation torque T_{max} [Nm]	Installation torque $T_{imp,max}$ ⁶⁾ [Nm]	Permissible tensile load N_{perm} ⁷⁾ [kN]	Permissible shear load V_{perm} ⁷⁾ [kN]	Required edge distance (with one edge) for		Required spacing for Max. Load s_{cr} [mm]	Min. spacing s_{min} ⁸⁾ [mm]	Min. edge distance c_{min} ⁸⁾ [mm]
								Max. tension load c [mm]	Max. shear load c [mm]			
FBS II 6x40 ⁵⁾	gvz	80	40	10	450	1,2	4,3	35	110	100	35	35
FBS II 6x45 ⁵⁾	gvz	90	45	10	450	1,7	4,3	35	105	110	35	35
FBS II 6x50 ⁵⁾	gvz	90	50	10	450	1,9	4,3	35	100	120	35	35
FBS II 6x55 ⁵⁾	gvz	100	55	10	450	2,4	6,3	35	145	135	35	35

For the design the complete assessment ETA-15/0352 has to be considered.⁹⁾

¹⁾ The partial safety factors for material resistance as regulated in the ETA-15/0352 as well as a partial safety factor for load actions of $\gamma_L = 1,4$ are considered. As an single anchor counts e.g. an anchor with a spacing $s \geq 3 \cdot h_{ef}$ and an edge distance $c \geq 1,5 \cdot h_{ef}$. Accurate data see ETA-15/0352.

²⁾ For higher concrete strength classes up to C50/60 higher permissible loads may be possible.

³⁾ Drill method hammer drilling resp. hollow drilling. For further allowable drill methods see ETA-15/0352.

⁴⁾ The anchorage depths smaller than 40 mm are only allowed for single anchors as part of a multiple fixing of non-structural systems.

⁵⁾ Diamond drilling not permitted.

⁶⁾ Maximum allowable torque for installation with any tangential impact screw driver.

⁷⁾ For combinations of tensile loads and shear loads or for shear loads with lever arm (bending moments) as well as reduced edge distances or spacings (anchor groups) we recommend to use our anchor design software C-FIX.

⁸⁾ Minimum possible axial spacings resp. edge distance while reducing the permissible load.

⁹⁾ The given loads refer to the European Technical Assessment ETA-15/0352, issue date 30/10/2018. Design of the loads according ETAG 001, Annex C, Method A (for static resp. quasi-static loads).

¹⁰⁾ A reinforcement in the concrete to prevent splitting is required. The width of the cracks has to be limited under consideration of the splitting forces at $w_k \sim 0,3$ mm.