

Uniflair LE TDAV-TUAV

Direct Expansion air-cooled units with backward-curved fans equipped with EC motor

20-100kW



**Perimeter cooling for
medium/large data center**

- > Refrigerant R-410A
- > EC Fans

Available Versions:

- > Downflow (TDAV)
- > Upflow (TUAV)]

Main Technical Features

Microprocessor control

- Local or remote user terminal
- Regulation logic of cooling capacity and airflow integration
- Integrated LAN card for group connection
- Rotation and active stand-by management
- Remote on/off
- Modbus protocol interface
- Other external communication protocols: Bacnet, Lonworks, Trend, Metasys, TCP/IP, SNMP, and StruxureWare™ platform.

Electronic Expansion Valve

- Controlled by the microprocessor and a dedicated software
- Increased cooling precision
- Increased energy efficiency of the cooling cycle

Fans


- Electronically Commuted
- Fan speed adjustment via microprocessor control
- High partial load efficiency



Backward-curved blades fan with EC motor

Air-cooled Direct Expansion

- Heat is extracted from the room and transferred to the outside air using air-cooled refrigerant heat exchangers (condensers)
- The room unit and external condenser form an autonomous sealed circuit
- A wide range of configurations available

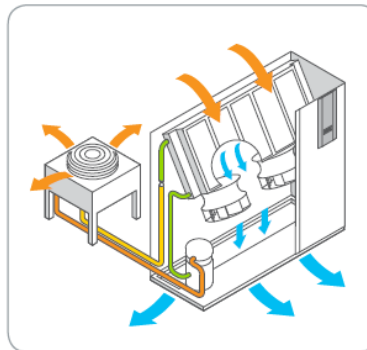

Note: This configuration is shown only as an example.

Compressors

- Possibility to select units with two tandem compressors for each circuit (models with the **21 or **42 suffix)
- Better efficiency and regulation capacity at partial loads


Main Technical Features

Cooling coil

- Elevated SHR and reduced pressure drops in the air section
- Made from copper tubes mechanically expanded on aluminum fins
- Hydrophilic treatment

Air filters

- EU4-pleated air filters housed in a metal frame
- Dirty filter differential pressure switch
- Low airflow differential pressure switch

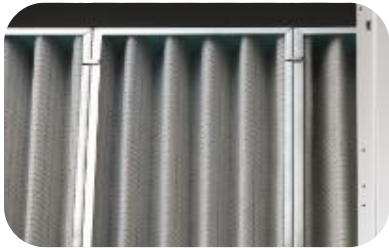

Metal frame air filter

Frame

- Selfsupporting frame in galvanized steel with panels.
- External panels coated with RAL9003 epoxy-polyester paint
- Internally lined with heat and sound-proofing insulation

Electrical panel

- Situated in a compartment separated from the air flow
- Complying with 2006/95/EC directive and related standard

Directives compliance

- 2006/42/EC, 2004/108/EC, 2006/95/EC, 97/23/EC, 842/2006/EC F-GAS regulation

Construction Options

- Immersed electrode humidifier (D/U versions)
- Low surface temperature electrical heaters with extended fans, complete with double safety thermostat and manual resetting (T/H versions)
- Hot gas and hot water reheating

External Accessories

- Remote, semi-graphic user terminal
- RS485 serial adaptor to communicate with external BMS
- LON FTT10 serial adaptor to communicate with external BMS managed with LON protocol
- TCP/IP serial adaptor to communicate with external BMS managed with SNMP protocol
- AFPS (Automatic Floor Pressurization System) that permits to adapt its availability as a kit with installation instructions
- Motorized damper
- Suction from the top or front discharge plenums
- Adjustable floor stands

Technical Data/1

TDAV-TUAV Model		0511A	0611A	0721A	0722A	0921A	0922A	1021A
Fan Type	EC Backward-curved centrifugal motor fan							
Power supply	V/ph/Hz	400/3/50Hz						
Fans	Nr.	1	1	1	1	1	1	1
Airflow	m3/h	5700	5700	8600	8600	8600	8600	8600
N° of compressors		1	1	2	2	2	2	2
Refrigerating Circuits		1	1	1	2	1	2	1
Gross Total Cooling Cap.(1) (2)	kW	20,3	24,9	25,6	25,8	34,5	34,2	37,6
Gross Sensible Cooling Cap.(1) (2)	kW	19,7	21,9	25,4	25,3	29,6	28,4	30,1
DIMENSIONS								
Height	mm	1960	1960	1960	1960	1960	1960	1960
Length	mm	1010	1010	1310	1310	1310	1310	1310
Depth	mm	750	750	865	865	865	865	865
TDAV-TUAV Model		1022A	1121A	1122A	1321A	1322A	1422A	1622A
Fans	Nr.	1	1	2	2	2	2	2
Airflow	m3/h	8600	12320	12320	12320	12320	16300	16500
N° of compressors		2	2	2	2	2	2	2
Refrigerating Circuits		2	1	2	1	2	2	2
Gross Total Cooling Cap.(1) (2)	kW	37,3	37,6	37,9	48,1	47,7	51,5	56,5
Gross Sensible Cooling Cap.(1) (2)	kW	29,2	36,7	36,3	39,4	38,0	50,9	55,8
DIMENSIONS								
Height	mm	1960	1960	1960	1960	1960	1960	1960
Length	mm	1310	1720	1720	1720	1720	2170	2170
Depth	mm	865	865	865	865	865	865	865

1. Gross Cooling capacities; fans must be deduced to obtain net cooling data.
2. Data refers to nominal conditions : room at 24°C- 50% RH , 45°C condensing temperature, and ESP = 20Pa.

Technical Data/2

TDAV-TUAV Model		1822A	2222A(3)	2242A(3)	2522A(3)	2542A(3)	2842 A(3)	3342A(3)
Fan Type	EC Backward-curved centrifugal motor fan							
Power supply	V/ph/Hz	400/3/50Hz						
Fans	Nr.	2	3	3	3	3	3	3
Airflow	m3/h	16500	21500	21500	21500	21500	21500	21500
N° of compressors		2	2	4	2	4	4	4
Refrigerating Circuits		2	2	2	2	2	2	2
Gross Total Cooling Cap.(1) (2)	kW	64,0	75,0	82,7	86,6	87,8	94,8	104,8
Gross Sensible Cooling Cap.(1) (2)	kW	57,5	75,0	81,8	82,8	83,0	87,5	89,6
DIMENSIONS								
Height	mm	1960	2175	2175	2175	2175	2175	2175
Length	mm	2170	2580	2580	2580	2580	2580	2580
Depth	mm	865	865	865	865	865	865	865
TUAV Model		2222A	2242A	2522A	2542A	2842A	3342A	
Fans	Nr.	2	3	3	3	3	3	
Airflow	m3/h	22000	22000	22500	22500	23000	23000	
N° of compressors		2	4	2	4	4	4	
Refrigerating Circuits		2	2	2	2	2	2	
Gross Total Cooling Cap.(1) (2)	kW	75,3	82,6	86,8	88,3	95,6	105,6	
Gross Sensible Cooling Cap(1) (2)	kW	75,3	81,7	85,8	85,7	91,8	93,6	
DIMENSIONS								
Height	mm	1960	1960	1960	1960	1960	1960	
Length	mm	2580	2580	2580	2580	2580	2580	
Depth	mm	865	865	865	865	865	865	

1. Gross Cooling capacities; fans must be deduced to obtain net cooling data.
2. Data refer to nominal conditions : room at 24°C- 50% RH , 45°C condensing temperature, and ESP = 20Pa.
3. Data refer to downflow unit.