



BPO LIGHTING

Hazardous Location LED Imports



FEATURES & SPECIFICATIONS:

High efficacy: up to 140lm/W
CRI>70
Trunnion, Pole or Slip Fitter Mounting
Type III, IV or V Distribution
Copper free aluminum
High vibration resistance
4000K - 5700K
5 years or other warranty period specified in agreement
L70 rating for more than 150,000 hours

HVAFL SERIES


EXPLOSION PROOF LED
CLASS I, DIVISION 2
CLASS II, DIVISION 1
CLASS II, DIVISION 2
CLASS III

LISTINGS:

- NEMA 4X, IP66
- UL1598/UL1598A/UL844
- CSA C22.2 No.137/N o.250.0
- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups E, F, G
- Class III
- Marine and Wet Locations
- IECEX
- ATEX

APPLICATIONS:

- Paint Booths
- Waste Water Treatment Plants
- Shipyard Facilities
- Coastal Marine Areas
- Chemical Plants
- Pharmaceutical Plants
- Cold Storage Facilities
- Hazardous Storage Areas
- Corrosive Environments

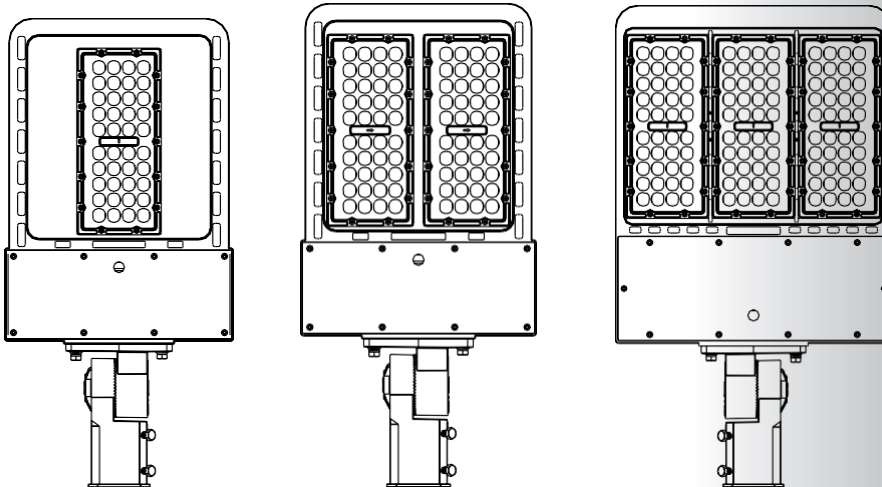

Hazardous Location LED Imports

www.bpolighting.com

14655 Champion Forest Dr. #1802 • Houston, Texas 77069 • (832) 977-1536


HVAFL SERIES

ORDERING INFORMATION


SERIES	O QWP V	" WATTAGE	"VOLTAGE	OPTIONS
HVAFL	[]	**	[]	[]
SERIES: HVAFL	O QWP V: RO "? 'RQNG'O QWP V UH"? 'UNR'HKVVG VT"? 'VTWP P QP	WATTAGE 100 = 100W (14,000 LUMENS) 150 = 150W (21,000 LUMENS) 200 = 200W (28,000 LUMENS) 300 = 300W (42,000 LUMENS)	VOLTAGE U = 120-277V (50/60 HZ) 480 = 200-480V	OPTIONS 3 = TYPE III DISTRIBUTION 4 = TYPE IV DISTRIBUTION 5 = TYPE V DISTRIBUTION 40K = 4000K 50K = 5000K 57K = 5700K

MOUNTING


Pole Mount




Slip Fitter

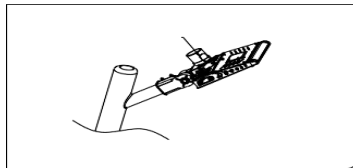


Trunnion Mount




DISTRIBUTION PATTERNS



Type III




Type IV




Type V


DIMENSIONS



11.6"×23.8"×3.3"



11.6"×23.8"×3.3"



14.2"×24.8"×3.6"

Hazardous Location LED Imports

www.bpolighting.com

14655 Champion Forest Dr. #1802 • Houston, Texas 77069 • (832) 977-1536