

DE Series - De-Gas Systems

**De-Gas De-Watering Systems
Designed for use on ENERGIZED Equipment
Oil Processor for use with Transformer Oil**



Features

- Designed specifically for electric utilities substation maintenance
- 230VAC single phase
- Easy to operate, Fully Automated
- ALL Controls located together
- Designed for long term use on ENERGIZED equipment
- Moisture in oil monitor
- Digital totalizing meter
- Split heaters for use in substations with lower amperage station service
- Filter canister that is drained using the onboard pump—no bucket needed
- Cast Iron variable speed oil pump—can be slowed down as much as needed for the size of the apparatus being processed
- On-site training ALWAYS included with every DE Series oil processor


Patent Pending

KRIN usa

41 County Road 2350
Lakeville, OH 44638

419-827-6061

www.krinusa.com



DE Series - De-Gas Systems

De-Gas De-Watering Systems
Designed for use on ENERGIZED Equipment
Oil Processor for use with Transformer Oil

Specifications

| | |
|--------------------|---|
| Vacuum Pump | Busch FOSSA dry running scroll pump Low Maintenance, low power consumption Ultimate pressure <1 torr |
| Oil Pump | Viking Cast Iron Construction Gear Pump Integral Pressure Relief Valve set at 75 psi |
| Oil Pump Motor | Baldor Industrial Wash Down Duty Variable Speed from 0 to full pump speed Allows for as slow a pumping speed as needed for specific application |
| Filter Canister | Size 2000 Swing Lid Canister (Vented) Designed for 2 Ertel Stacked Disc Filters |
| Plumbing | 1 ½" AND 1" Plumbing Stainless Steel Pipe, Zinc Plated Fittings and Single Coil Wire Petroleum Hose Bronze Solenoid INLET and OUTLET valves Remote valves at ends of connections hoses Basket Strainer to Protect System Digital Vacuum Sensor Pressure Gauge Pressure Differential Gauge for Filter Change Indication |
| Hose Connections | 1-1/2" INLET and 1" OUTLET hoses Shut Off Solenoid Valve on End of Hoses Cam-Lock Fittings with Plugs/Caps |
| Totalizer | Flomec OM030 positive displacement Digital Meter Displays both Flow Rate, Batch volume and total volume |
| Distillation Tower | KRIN proprietary Patent Pending distillation tower utilizing Permanent dispersion nozzle and media |
| Electrical | Control Panel for system control VFD to control oil pump Motor Speed Chamber vacuum pressure display Inlet moisture in oil display NEMA 4 Pressure High Limit Switch Automatic Foam control system High tower level and drip pan level sensors Entire system PLC controlled |
| Skid Pan and Frame | All Equipment is mounted inside a Drip Pan, Painted Black All Equipment mounted inside cabinet for outdoor use Extensive Grounding of Components to the Drip Pan Equipment Ground connection point |

KRIN usa


41 County Road 2350
Lakeville, OH 44638

419-827-6061

www.krinusa.com


Patent Pending





DE Series - De-Gas Systems

Patent Pending

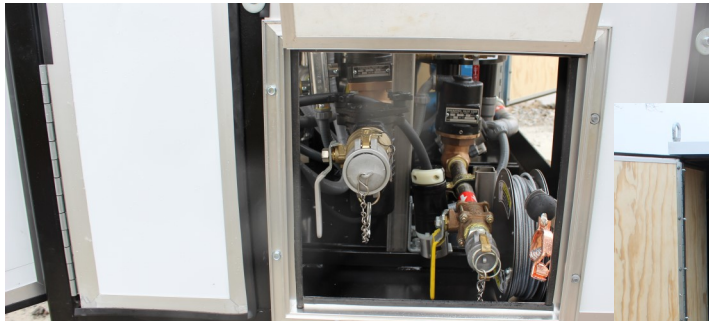

Options

- 5-20 GPM pumps
- Single phase or 3 phase power
- Single or Dual Heaters
- Single or Dual Filter Canisters
- Auxiliary Hoses and Fittings
- Special Equipment Ground Cables
- Moisture in Oil Monitors
- Feel free to ask for any options you need



What they are saying about KRIN systems

These systems look like they were built by people that have actually worked in the field -

Substation Maintenance Crew Lead, NC

This is the easiest system I have ever run

Substation Maintenance Tech, WA

This system gets the oil cleaner than any press we've ever had


Substation Maintenance Supervisor, SC

KRIN usa

41 County Road 2350
Lakeville, OH 44638

419-827-6061

www.krinusa.com



DE Series - De-Gas Systems



KRIN usa

41 County Road 2350
Lakeville, OH 44638

419-827-6061

www.krinusa.com

KRIN  **usa**