
DATA SHEET: EMPOWER2



EMPOWER2 3W LED Emergency Maintained/Non-Maintained Downlight



MLA part code:	EMPOWER2	EMPOWERW2
Description:	1 x 3W LED Emergency downlight	
F .	maintained/non-maintained	
Weight (kg):	0.45	
Wattage (W):	3	
Lumens:	130	
Lumens per watt:	30	
Total circuit power (W):	4	
Overall downlight dimension (mm):	55	
Cut out (mm):	45	
Overall inverter dimensions (mm):	30 (h) 183 (w) 30 (d)	
Overall battery dimensions (mm):	25 (h) 170 (w) 25 (d)	
Charge time (Initial):	24 Hrs	
Discharge duration:	3 Hrs	
Battery type:	4.8V 1800mAh Ni-Cd 4xSub C cell	
Input voltage:	Mains 230V 50Hz	
Construction:	Aluminium downlight, Self extinguishing	
	polycarbonate inverter	
Class:	Class II	
IP rating:	IP20	
Life span:	30,000 Hrs	
Warranty:	2 Years (Excluding battery)	
Supplied with:	Downlight – Recessed dual spring clip	
	Battery Pack & Inverter	
Dimmable:	No	
Instruction sheet:	Yes	
Origin of manufacture:	China	
Quality assurance system:	ISO 9001	
Declaration of conformity (held on file):	Yes	
Manufactured in accordance with:	EN55015, EN61547, EN61000-3-2,	
	EN61347-2-7, EN61347-2-3 BSEN60598	
CCI:	6000K	3000K

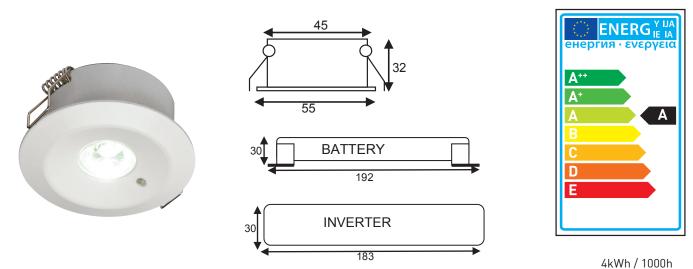

