



STABILE

ONTARIO RD011A

CE UNI EN ISO 20345:2012 S3 CI SRC

Calf boot, IDROTECH® WRU oiled grain leather thickness 1,8-2,0 mm.

Soft Windtex® water resistant membrane lining, with very good perspiration and abrasion resistance.

Boot with refracting fabric insert.

COMPLETELY METAL FREE BOOT

TOECAP 200J polymeric composite non-thermic according to EN 12568

MIDSOLE flexible antiperforation composite fabric according to EN 12568

SOLE STABILE bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

INSOLE 5000, three-materials extracomfort: perspiring, removable, anatomic, absorbing, ESD and anti-bacterial

CI insulated surface against cold -17°C


Boot height sole included **28,5 cm**

Size 39-47 Shoe weight Sz 42 gr. 770

MATERIALS



TECHNOLOGIES

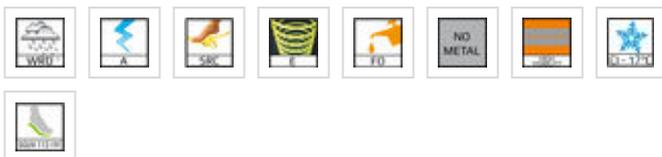

SECTORS



SOLE



Stabile is the comfortable alternative to the classic and "heavy" shoe for building sector. This sole is highly performing with specific dowels, with dimensions and shapes to assure the maximum **stability**, with self-cleaning drainage channels to assure a perfect cleaning and with a soft compound to isolate the foot to the continuous **shocks**. Line studied with a lot of attention to the technology of uppers and lightness of the materials.

PLUS



Windtex® is an innovative membrane that blocks wind and water, by guaranteeing at the same time a homogeneous transpiration of the foot.

The degree of transpiration of Windtex® together with windproof property, allow the maintenance of microclimate of the shoe.

This membrane, with technology Aegis®, builds and antimicrobial barrier against unpleasant odors, fungi and other microorganisms.



IDROTECH® is a leather treatment with the aim to optimize the water resistance and the foot perspiration.

This particular tanning method, thanks to the used mineral salts, gives an excellent softness and a complete mechanical resistance to oils and hydrocarbons.

The IDROTECH® leather is certified according to the norms ISO 4045, ISO 17075 and ISO 5403.

ANTISLIPPING TEST RESULTS



SRA ceramic + NaLS	HEEL >= 0,28	0,42
	FLAT >= 0,32	0,44
SRB steel + glycerol	HEEL >= 0,13	0,20
	FLAT >= 0,18	0,18